


HATHAYA'S HAREM PANTS

ORIGINAL

JEHLOR
P-2
\$2.00

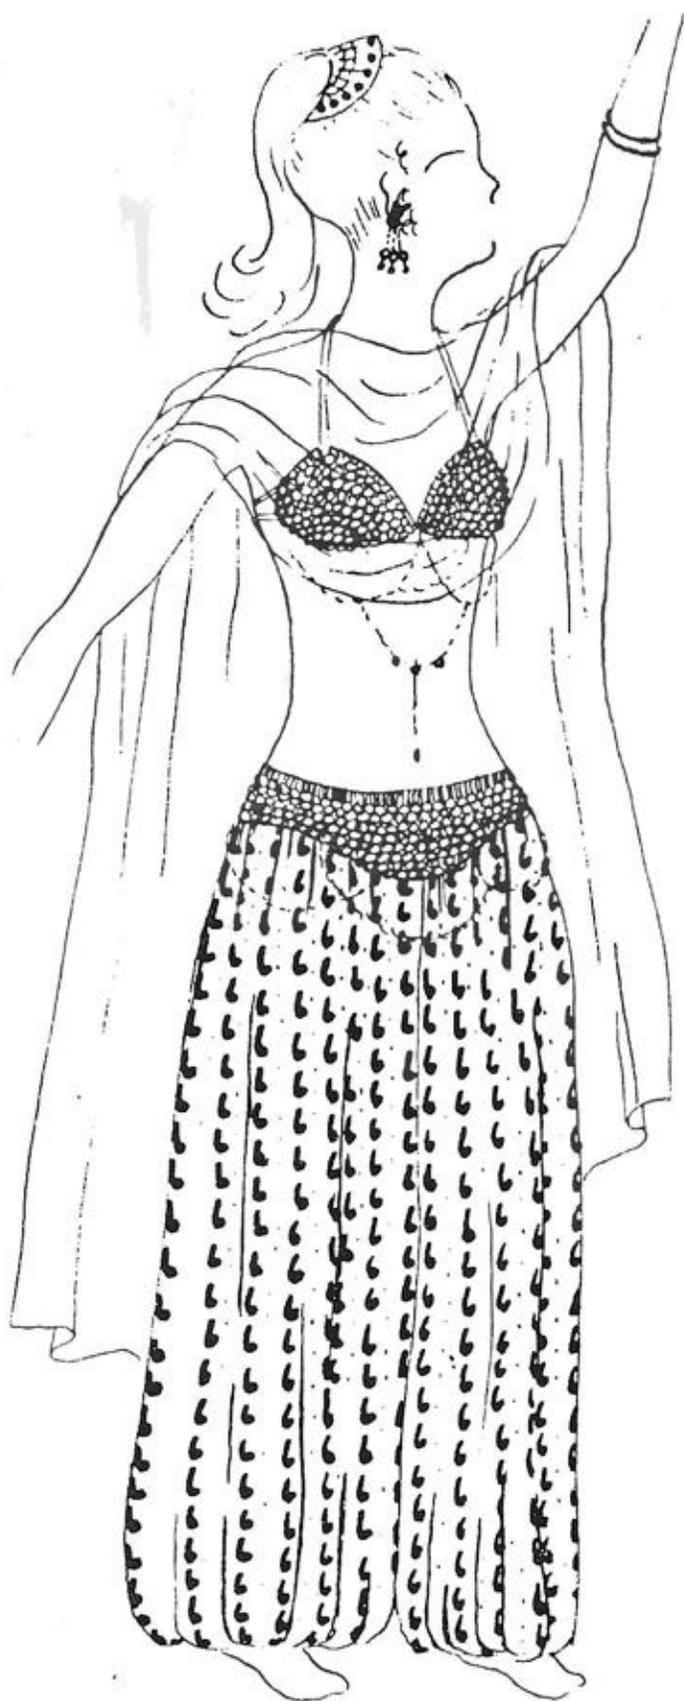


VIEW 1

Suggested Fabrics:

Printed chiffon, metallic patterned chiffon, polyester or nylon single knits, interlock knits, jersey knits, soft brocade, velour, panne (knit) velvet, cotton challis, border print, silk.

Sewing Notions:

Thread, $\frac{3}{4}$ " elastic for hip, $\frac{3}{8}$ " elastic for ankle.

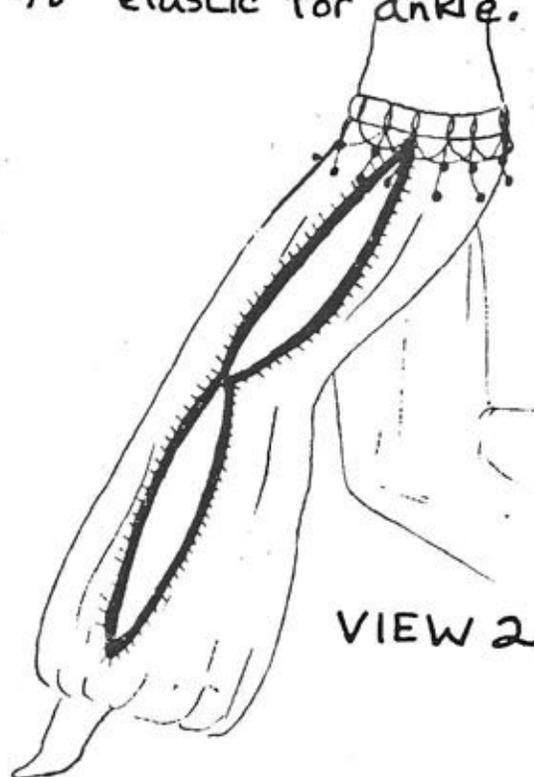

VIEW 2

- FABRIC REQUIRED


Use 45", 54" or 60" material only for the desired fullness.

- If hip to floor measures 34" - buy 92" of material (2 5/8 yds.)
- If hip to floor measures 35" - buy 94" of material (2 5/8 yds.)
- If hip to floor measures 36" - buy 96" of material (2 3/4 yds.)
- If hip to floor measures 37" - buy 98" of material (2 3/4 yds.)
- If hip to floor measures 38" - buy 100" of material (2 7/8 yds.)
- If hip to floor measures 39" - buy 102" of material (2 7/8 yds.)
- If hip to floor measures 40" - buy 104" of material (3 yds.)
- If hip to floor measures 41" - buy 106" of material (3 yds.)


- CUTTING LAYOUTS - black area represents fabric

Circle cutting layout for your view and fabric width


VIEW 1 - 45" fabric

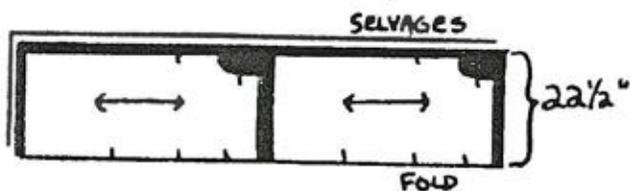


VIEW 1 - 54" - 60" fabric

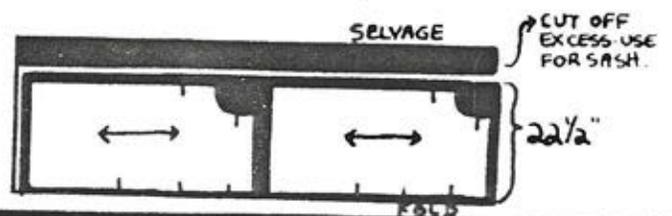

VIEW 2 - 45" fabric

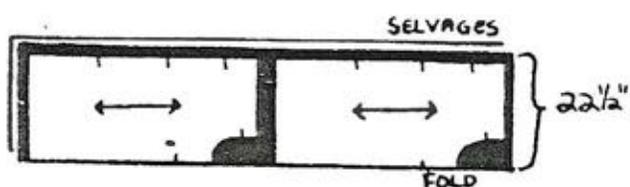

VIEW 2 - 54" - 60" fabric

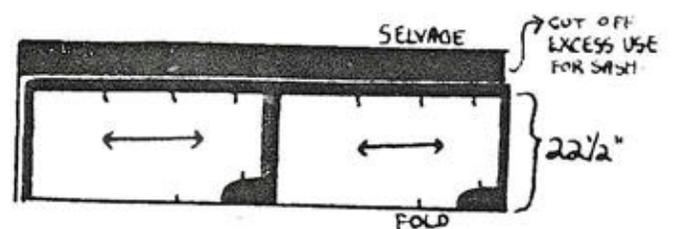


● SEWING DIRECTIONS


■ Shaded area is right side of fabric.

NOTE: $\frac{5}{8}$ " seams.

● VIEW 1

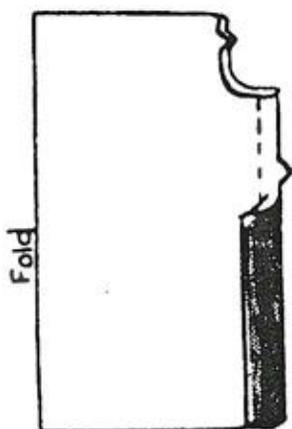

Stitch inner leg seams.
Press open.

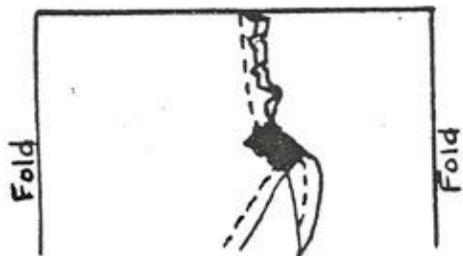

Stitch center back and
center front seams. Clip curves.



Fold over 1" casing at top
edge.

Leave small opening to
insert elastic.

Cut piece of $\frac{3}{4}$ " elastic
5" shorter than your
hip measurement.

Thread elastic through
casing. Stitch ends of
elastic together securely.
Stitch opening.




Fold over $\frac{1}{2}$ " casing at bottom
of each leg.

Leave small opening to
insert elastic.


Cut 2 pieces of $\frac{3}{8}$ " elastic
about 8-9" long (to fit around
bottom of calf)

Thread elastic through casing.
Stitch ends of elastic together
securely.


Stitch opening.

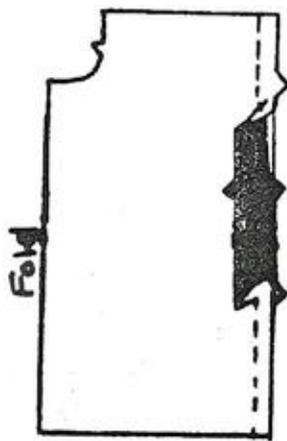

Stitch outer leg seams from top to notch and from bottom to notch. Press open seam allowance.

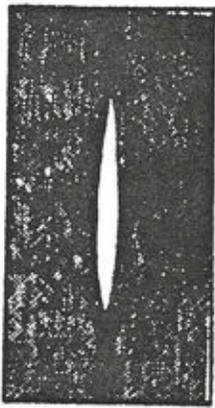

Top stitch seam allowance on each side - or sew decorative trim on outside if desired. Tack opening at center small dot • or leave open.

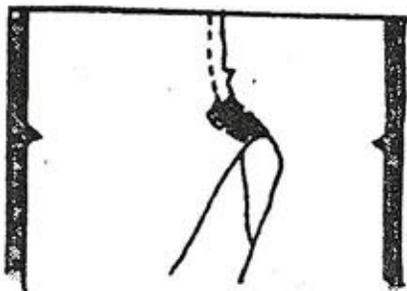

stitch center back and center front seams. Clip curves.


Finish hip casing and bottom leg casing same as View 1.

• TRIM VARIATIONS

- sew small costume coins on in random design.
- sew decorative braid trim from hip down in alternating length strips, from 3 to 6" apart.
- sew small tassels on in random design.

• SASH

If using 54 or 60" wide material - cut off excess 9 or 15" (see cutting layout). Cut ends off strip on the diagonal. Hem sides and ends.

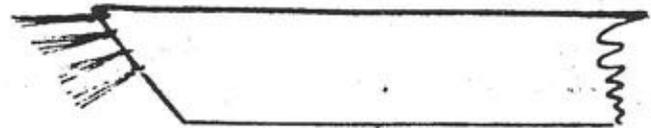

To add fringe use 12" lengths of 6 strand rayon embroidery thread in a matching or contrasting color. Thread large eye needle. Pull threads through fabric - even ends - tie over-hand Knot close to fabric. Repeat $\frac{1}{4}$ to $\frac{1}{2}$ " apart.